


8. Hydraulics


Dr. Gergely Kristóf
 Dept. of Fluid Mechanics, BME
 April, 2009.

The mechanical energy balance



$$h_{t,2} - h_{t,1} = H - \sum_i \Delta h'_i$$


From this, we can express the delivery height of the pump:



$$H = h_{t,2} - h_{t,1} + \sum_i \Delta h'_i$$

Given as: $H = f(q_v)$.
 Given, constant.
 Can be expressed in terms of: $q_v^2 \cdot \text{const.}$

Incompressible flow in closed conduits



The Bernoulli's principle:

$$p_1 + \rho g z_1 + \frac{\rho}{2} v_1^2 = p_2 + \rho g z_2 + \frac{\rho}{2} v_2^2 + \Delta p'$$

p_1 elimination of the hydrostatic pressure
 p_2


The total pressure loss:

$$\Delta p' = \sum_i \zeta_i \frac{\rho}{2} v_i^2 + \sum_j \frac{\rho}{2} v_j^2 \frac{L_j}{d_j} \lambda_j$$


local losses losses due to straight pipe sections

Average velocity in a cross-section: $v_i = \frac{q_v}{A_i}$ in which A_i is the cross-sectional area of the pipe

Problem #8.1



- Explain how the characteristic curves could be combined!
- What is the head loss of conduit #5?
- What total heads are produced by pump A and pump B?

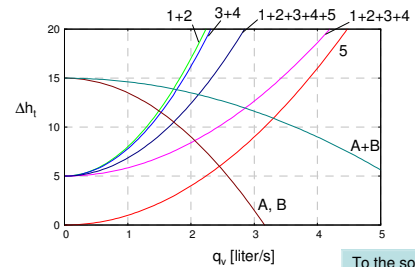


To the solution

Passive elements vs. pumps

We can calculate in meter dimensions:

$$\frac{p_1}{\rho g} + z_1 + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + z_2 + \frac{v_2^2}{2g} + \Delta h'$$

$h_{t,1} \quad h_{t,2} \quad \Delta h' = \frac{\Delta p'}{\rho g}$




Head losses of passive elements can be restored by using pumps:

$$\frac{p_1}{\rho g} + z_1 + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + z_2 + \frac{v_2^2}{2g} - H$$


H can be regarded as the work done on unit weight of fluid. $H = f(q_v)$.

Looped networks




- Favorable in the cases of large supply networks (eg. in communal water supply systems).
- Water flow never stops in the conduits.
- Large local consumptions are tolerated. (Usually less pressure drop is caused.)
- When one conduit must be closed (eg. for maintenance) the rest of the supply network stays operational.

Kirhoff laws



I.) The mass balance must be fulfilled in every nodes.



II.) The sum of pressure drops must be zero for each loop.

Node matrix

We need to assign directions to the edges (directed graph).

The unknowns are the x_j volume flow rates of the edges (pipes).

+: flow direction meets the edge direction;
-: flow direction in adverse direction.

Nodal equations:
$$q_i = \sum_{j=1}^E a_{ij} x_j \quad (i: 1..N)$$


a_{ij} are the elements of the topology matrix.

$a_{ij} = 1$: if edge j leads out of node i ;

$a_{ij} = -1$: if edge j leads into node i ;

$a_{ij} = 0$: if edge j does not meet node i .

Network elements

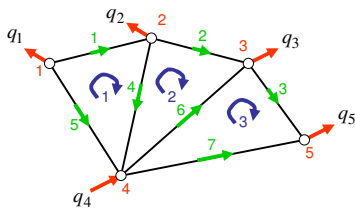


nodes: 1..N
edges: 1..E
loops: 1..L

q_i represent a supply, when $q_i > 0$, and consumption, when $q_i < 0$.
 q_i -s are localized at the nodes.
 q_i values must fulfill:

$$\sum_{i=1}^N q_i = 0$$

Number of equations

We have only $N-1$ independent nodal equation, because the sum of q_i values must be 0. Eg:



$$N = E + 1 - L$$

We have E unknowns, thus:

$$E = \underbrace{N - 1}_{\text{Number of independent nodal equations}} + L$$


Number of independent nodal equations (green text)
Number of loop equations (orange text)

With the loop equations we can close the system.

Tree topology

Tree topology can always be converted into looped topology:
The nodes representing the external space are of identical pressure and must fulfill the continuity too, thus can be regarded as one single node.

E.g. the topology of an air extraction network:

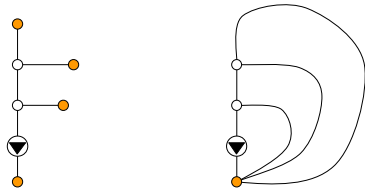

The looped topology is more general than the tree topology.

Loop equations

The total pressure loss of edge j reads:
$$\Delta p'_j = \frac{\rho}{2} \frac{x_j |x_j|}{A_j^2} \left(\frac{\ell_j}{d_j} \lambda_j + \zeta_j \right)$$

$$\Delta p'_j = k_j x_j |x_j|$$

The system of loop equations is:
$$\sum_{j=1}^E b_{kj} \Delta p'_j = 0 \quad (k: 1..L)$$

b_{kj} are the elements of the loop matrix:

b_{kj} are the elements of the loop matrix.


$b_{kj} = 1$: if the direction of edge j meets the direction of loop k ;

$b_{kj} = -1$: if edge j is in adverse direction;

$b_{kj} = 0$: if edge j is not contained by loop k .

Problem #8.2

a) Specify the loop matrix for the pipe network below:

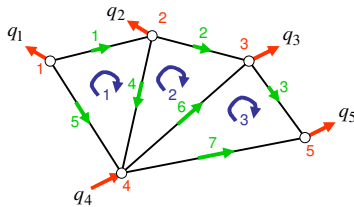

b) Construct the loop equation for loop 1 using constant indices (1,4,5) for the unknown volume flow-rates.

To the solution

The loop correction (2)

$$\sum_{j=1}^E b_{kj} k_j \operatorname{sgn}(x_j) (x_j^2 + 2x_j b_{kj} q_k) = 0$$

$$\sum_{j=1}^E (b_{kj} k_j x_j |x_j| + 2b_{kj}^2 k_j |x_j| q_k) = 0$$

q_k is a constant value within loop k , therefore:

$$\sum_{j=1}^{\text{loop } k} b_{kj} k_j x_j |x_j| + q_k \sum_{j=1}^{\text{loop } k} 2b_{kj}^2 k_j |x_j| = 0$$

$$q_k = - \frac{\sum_{j=1}^{\text{loop } k} b_{kj} k_j x_j |x_j|}{\sum_{j=1}^{\text{loop } k} 2b_{kj}^2 k_j |x_j|}$$

Then we correct the flow-rates:

$$x_j^{n+1} = x_j^n + b_{kj} q_k$$


The Cross method

An easy to implement iterative solution method for looped networks.

1. We set the volume flow rates on the way to fulfill the nodal equations. Eg. we set $x_i = 0$.
2. In one loop we correct the flow rates of all edges within the loop by adjusting their x_j values with a q_k loop correction flow rate. This method does not violate the validity of the nodal equations.
3. We apply loop corrections on every loops, than we repeat the corrections in cycles. We always spoil the neighboring nodes at some extent, therefore many cycles may be necessary.

Wave propagation in long liquid product pipelines (1)

Due to pressure jump dp , the pipe expands by dA .



Continuity:

$$(a - dv)(\rho + d\rho)(A + dA) = a \rho A \quad a \rho dA + a dp A - dv \rho A = 0$$

Momentum theorem:

$$A \rho a (a - (a - dv)) = (A + dA)(p + dp) - Ap - \underbrace{p_{\text{wall}} dA}_R$$

Term R is the pressure force acting on the pipe wall.

$$p_{\text{wall}} \approx p \quad \text{thus the Alievi theorem holds:} \quad \rho a dv = dp$$

The loop correction (1)

The loop equations: $\sum_{j=1}^E b_{kj} \Delta p'_j = 0$

The corrected flow-rates must fulfill the loop equation:

$$\sum_{j=1}^E b_{kj} k_j (x_j + b_{kj} q_k) |x_j + b_{kj} q_k| = 0$$

When calculating q_k we can make approximations:

We assume that the sign of x_j is not changed when being corrected:

$$\sum_{j=1}^E b_{kj} k_j \operatorname{sgn}(x_j) (x_j + b_{kj} q_k)^2 = 0$$

When q_k is small, its square can be neglected:

$$\sum_{j=1}^E b_{kj} k_j \operatorname{sgn}(x_j) (x_j^2 + 2x_j b_{kj} q_k) = 0$$

Wave propagation in long liquid product pipelines (2)


$$a \rho dA + a dp A - dv \rho A = 0 \quad \rightarrow \quad \frac{dv}{a} = \frac{dA}{A} + \frac{dp}{\rho}$$

$$\rho a dv = dp \quad \rightarrow \quad \frac{dv}{a} = \frac{dp}{\rho a^2}$$

$$\frac{dp}{\rho a^2} = \frac{dA}{A} + \frac{dp}{\rho}$$

$$a^2 = \frac{1}{\frac{\rho dA}{A dp} + \frac{dp}{dp}}$$

Wave propagation in long liquid product pipelines (3)



(Hook's law) $\sigma = E_w \epsilon$ $\sigma = E_\ell \epsilon$

$$\frac{dp D}{2s} = E_w \frac{dD}{D} = \frac{E_w}{2} \frac{dA}{A}$$

$$\frac{\rho dA}{A dp} = \frac{\rho D}{E_w s}$$

$$\frac{dp}{\rho} = E_\ell \frac{d\rho}{\rho}$$

$$\frac{d\rho}{dp} = \frac{E_\ell}{\rho}$$

$$a^2 = \frac{1}{\frac{\rho dA}{A dp} + \frac{d\rho}{dp}} = \frac{1}{\frac{\rho D}{E_w s} + \frac{\rho}{E_\ell}} = \frac{E_r}{\rho}$$


in which E_r is the reduced modulus:

$$\frac{1}{E_r} = \frac{1}{E_\ell} + \frac{1}{E_w} \frac{D}{s}$$

Pipe friction coefficient for unsteady flows

For periodical flows of harmonic time dependence λ can be specified as a function of Re and Sh = $f D / \nu$.

When the pressure gradient changes direction:



Unsteady λ values are usually greater than the steady values due to the continuous refreshment of the boundary layer.

For laminar flow even an analytical solution can be found in the literature.

For turbulent flows λ can be identified on the basis of resonance experiments carried out in closed pipes. According to our own measurements, λ fell in the range of **0.02-0.04** (for some experiments in the ranges of Re: 10^4 - 10^5 and Sh: 0.005-0.02).

Problem #8.3

Compare the wave celerity in still water with those in a pipeline of given geometrical parameters:

Pipe diameter: 500 mm,
Wall thickness: 10 mm,
 E_{water} : 2.0×10^9 Pa,
 E_{steel} : 2.1×10^{11} Pa.

To the solution

PDE for $p(t,x)$ and $v(t,x)$

$$a^2 = \frac{\partial p}{\partial \rho} \Big|_{s=\text{const.}}$$

$$\frac{\partial \rho}{\partial t} + v \frac{\partial \rho}{\partial x} + \rho \frac{\partial v}{\partial x} = 0$$

$$\frac{1}{a^2} \frac{\partial p}{\partial \rho} \frac{\partial \rho}{\partial t} + v \frac{\partial p}{\partial \rho} \frac{\partial \rho}{\partial x} + \rho \frac{\partial v}{\partial x} = 0$$

$$\frac{\partial p}{\partial t} + v \frac{\partial p}{\partial x} + \rho a^2 \frac{\partial v}{\partial x} = 0$$

$$\rho a \frac{\partial v}{\partial t} + \rho a v \frac{\partial v}{\partial x} = -a \frac{\partial p}{\partial x} + \rho a f$$

Now, every term is in Pa/s.

Unsteady flow in liquid product pipelines

Continuity equation for constant nominal cross-section pipes:

$$\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x} (\rho v) = 0$$

$$\frac{\partial v}{\partial t} + v \frac{\partial v}{\partial x} = -\frac{1}{\rho} \frac{\partial p}{\partial x} + f$$

f denotes the force on unit mass of fluid due to wall friction:

$$f = \frac{1}{\rho} \frac{\Delta p'}{\Delta x}$$

for turbulent flow, we can state:

$$\Delta p' = -\frac{\rho}{2} v |v| \frac{\Delta x}{D} \lambda, \text{ thus } f = -\frac{\lambda}{2D} v |v|$$

Acoustical assumptions

$$\frac{\partial p}{\partial t} + v \frac{\partial p}{\partial x} + \rho a^2 \frac{\partial v}{\partial x} = 0$$

$$\rho a \frac{\partial v}{\partial t} + \rho a v \frac{\partial v}{\partial x} = -a \frac{\partial p}{\partial x} + \rho a f$$

1) we assume: $\rho \equiv \rho_0$ and $a \equiv a_0$

$$\frac{\partial p}{\partial t} + v \frac{\partial p}{\partial x} + a_0 \frac{\partial \rho_0 a_0 v}{\partial x} = 0$$

$$\frac{\partial \rho_0 a_0 v}{\partial t} + v \frac{\partial \rho_0 a_0 v}{\partial x} = -a_0 \frac{\partial p}{\partial x} + \rho_0 a_0 f$$

2) we assume: $v \ll a_0$

Since $\rho_0 a_0 v$ must be of the same order of magnitude as p .

Characteristic variables

$$\frac{\partial p}{\partial t} + a_0 \frac{\partial \rho_0 a_0 v}{\partial x} = 0 \quad (C)$$

$$\frac{\partial \rho_0 a_0 v}{\partial t} + a_0 \frac{\partial p}{\partial x} = \rho_0 a_0 f = -\underbrace{\frac{\lambda}{2D} \rho_0 a_0 v |v|}_{\zeta} \quad (M)$$


$$(C+M) \quad \frac{\partial}{\partial t} (p + \rho_0 a_0 v) + a_0 \frac{\partial}{\partial x} (p + \rho_0 a_0 v) = -\zeta v |v|$$

$$\frac{\partial \alpha}{\partial t} + a_0 \frac{\partial \alpha}{\partial x} = -\zeta v |v| \quad \text{in which} \quad \alpha = p + \rho_0 a_0 v$$


$$(C-M) \quad \frac{\partial}{\partial t} (p - \rho_0 a_0 v) - a_0 \frac{\partial}{\partial x} (p - \rho_0 a_0 v) = \zeta v |v|$$

$$\frac{\partial \beta}{\partial t} - a_0 \frac{\partial \beta}{\partial x} = \zeta v |v| \quad \text{in which} \quad \beta = p - \rho_0 a_0 v$$


Boundary conditions



Dead end: $v = \frac{\alpha - \beta}{2\rho_0 a_0} = 0 \rightarrow \alpha = \beta$



Outflow: $p_0 = \frac{\alpha + \beta}{2} \rightarrow \alpha = 2p_0 - \beta$



Inflow: $p + \frac{\rho_0}{2} v^2 = p_0$

$$\frac{\alpha + \beta}{2} + \frac{\rho_0}{2} \left(\frac{\alpha - \beta}{2\rho_0 a_0} \right)^2 = p_0$$


Characteristic directions

directional derivatives of α and β

$$\frac{\partial \alpha}{\partial t} + a_0 \frac{\partial \alpha}{\partial x} = -\zeta v |v| \quad \text{In the direction } \frac{dx}{dt} = a_0$$

$$\frac{\partial \beta}{\partial t} - a_0 \frac{\partial \beta}{\partial x} = \zeta v |v| \quad \text{In the direction } \frac{dx}{dt} = -a_0$$

$$d\alpha = -\zeta v |v| dt \quad d\beta = \zeta v |v| dt$$



Junction



By neglecting the head losses we have got the following relations:


$$v_1 A_1 + v_2 A_2 + v_3 A_3 = 0$$

$$p_1 = p_2$$

$$p_2 = p_3$$

We have got 3 incoming characteristic variables from the 3 pipes. By using the above 3 algebraic relations we can determine the 3 unknown (outgoing) characteristics.

Method of characteristics



Let's calculate p_3 and v_3 , from given p_1, v_1 and p_2, v_2 !

$$\alpha_1 = p_1 + \rho_0 a_0 v_1$$


$$\beta_2 = p_2 - \rho_0 a_0 v_2$$

$$\alpha_3 = \alpha_1 - \zeta v_1 |v_1| \Delta t$$

$$\beta_3 = \beta_2 + \zeta v_2 |v_2| \Delta t$$

$$p_3 = \frac{\alpha_3 + \beta_3}{2}$$

$$v_3 = \frac{\alpha_3 - \beta_3}{2\rho_0 a_0}$$



Here, we need boundary conditions.

Problem #8.4


We suddenly open one end of an evacuated pipe. What will be the pressure and inflow velocity immediately after the opening? Please, use the method of characteristics and calculate α, β quantities! Define the initial state of the pipe on the basis of $v=0, p=\text{const.}$ conditions.

Pressure in the closed pipe:	50 kPa,
External pressure:	100 kPa,
Air density:	1.2 kg/m ³ ,
Sound speed:	334 m/s.

To the solution


Application examples

Boundary conditions: the reactor




Ethylene polymerization

Operating pressure ~ 2700 bar.
Pipe stresses caused by the pressure fluctuations and by the mechanical vibrations need to be analyzed.

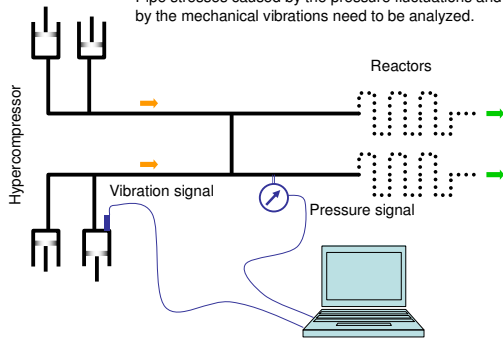


Simulation results vs. on site measurements

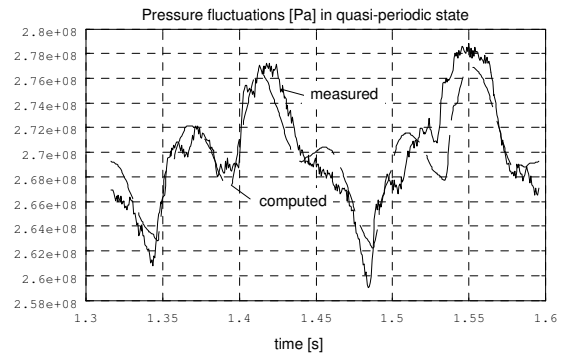

Boundary conditions: the compressor

Compressor discharge (Velocity at the pipe inlet)

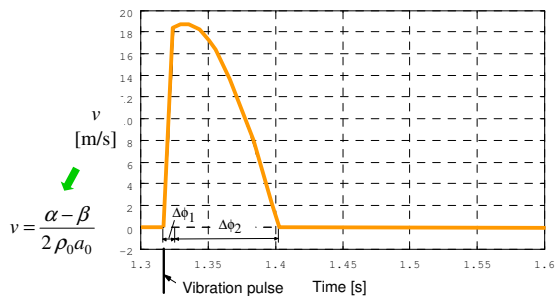

Phase angles of the linear ($\Delta\phi_1$) and the sinusoidal ($\Delta\phi_2$) parts are set on the basis of geometrical assumptions.
The phase angle was obtained from the vibration signal caused by the valve opening.