


## BELTEX M25/09 TF CONVEYOR BELT

Code CG41

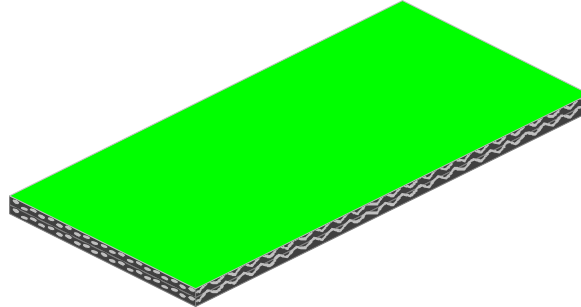

### Most popular application:

Flat conveying belt. Paper converting, graphic arts, binderies, magnetic conveyors, packaging

### BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	NBR Elastomer	2 ply P	P Fabric
Finishing	Fabric	---	Impregnation
Colour	Green	---	Black
Friction coefficient on iron	0,7	---	0,25

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	2,5	Breaking load [N/mm]	60	Working Temperature [°C]	-20 ÷ 100
Thickness[mm]	0,9	Production width [mm]	1850	Diameter [mm]	20
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	1,0	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of skiving	A	Dimensions [mm]	15 ÷ 20	Press temperature [°C]	90	Pressing time. [min]	10
-----------------	---	-----------------	---------	------------------------	----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.